

## Model: ADOS-2536B1080SL


2.1 Mp Starvis Back-illuminated Water-proof IR AHD/CVI/TVI/CVBS Bullet Cameras



### Key features

- ◆ 1/2.8" Sony 2.1 Megapixel Progressive Scan CMOS
- ◆ 25/30fps@1080P, 25/30fps@720P
- ◆ Effective Pixels 2.1MP, 1920x1080
- ◆ Video Transmission 300meters
- ◆ IR Range 20-25m
- ◆ OSD Menu, control over coaxial cable
- ◆ IP66 AC24V/DC12V
- ◆ 120dB WDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR

### Dimension(mm)

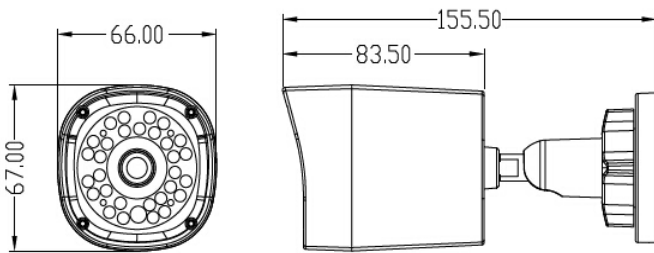

### Specifications

CAMERA	
Image Sensor	IMX291
DSP	HTC1080
Image Sensor	1/2.8" SONY 2.1MP Starvis Back-illuminated
Signal System	PAL/NTSC
Min. illumination	0.001Lux @ (F1.2,AGC ON),0 Lux with IR
	0.005Lux @ (F1.4,AGC ON),0 Lux with IR
SN	≥50dB
Day & Night	ICR
Shutter Speed	PAL:1/50-1/50000 NTSC:1/60-1/60000
Wide Dynamic Range	dWDR, OFF/ON(Level 0-8)/Auto
Digital Noise Reduction	2D/3D
Lens	3.6mm(optional 6mm)
FOV	89°~ 35°
IR LED	14miu*20pcs
IR Wavelength	850nm
IR Range	20-25m
IMAGE	
Effective Resolution	1920x1080
Frame	PAL:25fps ,NTSC:30fps
White Balance	ATW/AWC-SET/Indoor/Outdoor/MANUAL
Gain	Level 0-15
Light Compensation	BLC/HLC/OFF
VIDEO OUTPUT	
Max Distance	>300m, 75-5
Output Interface	1ch HD Coaxial
GENERAL	
Power Supply	AC24V±25% / DC12V±25%
Power Consumption	Max 16.6W Max 22.9W
Operating Temperature	-20℃~+55℃
Operating Humidity	0% - 85% RH
Ingress Protection	IP66
Approvals	CE / FCC / RoHS / SGS/KC
Material	Aluminium Alloy
Product Dimensions	155.5(W) x 66(H) x 67(D)mm
Product Weight	750g